


## MAGNETIC FIELD NULLING ADJUSTMENT TAB

Mounting and adjustment instructions



1. Place as shown, in the slot between driver and pickguard, or between driver and adjacent mini humbucker.
2. Slide back and forth using a finger or non-metal object, to find the proper position to minimize distortion and/or sustainer squealing. Sustainer should be ON, with a large string sustaining.

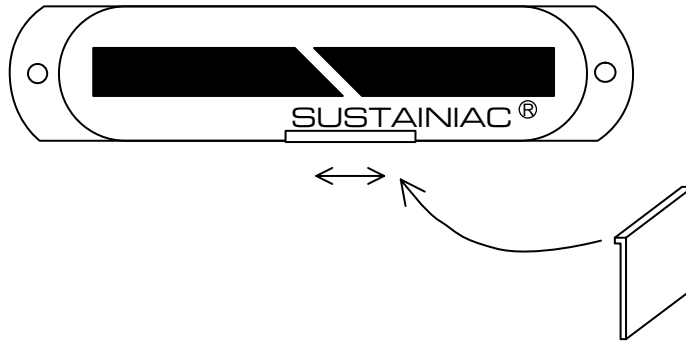