

HOOKUP DIAGRAM TWO-HUMBUCKER GUITAR WITH SUSTAINIAC® INSTALLED TWO-POT STYLE

(must give up tone control, or add optional toggle switch harmonics control. Then, connect tone pot to output jack tip.)


DRIVER
"DUMMY COVER" IF HB SIZE
BRIDGE PU

Make sure all shields and pot bodies are connected to ground


N BOTH B

HARMONICS


mix cap polarity not important



Twist and keep short (may need shielding if grunge or oscillation present)



SHIELD




ground = Black

Splice

These wires will need shielding if grunge is present.

SHIELD OPTIONAL

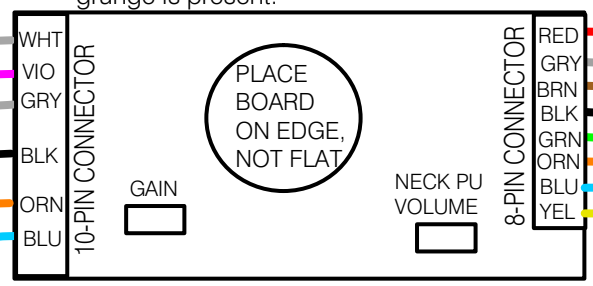

Shorten and join 2 blue wires

IMPORTANT: DRIVER POLARITY
Use polarity shown for standard bridge pickups having "negative-on-pullaway" polarity. For pickups having "positive-on-pullaway" polarity, reverse the driver red and black wires.

CAUTION: Do not solder ground wire to switch body of pot/switch control. Solder to potentiometer section or to small solder tab. Switches have plastic parts inside which will melt!

